

# 3M™ Performance Series Intercom System Quick Reference Guide

## Operating Controls

**LCD Display Panel:**  
Displays operating instructions.

**HOLD:**  
Allows disconnection from a current call with the ability to return to that call later.

**Volume Control:**  
Adjust Station Selector inbound volume.


**Left/Right Arrows:**  
Control Call Station selection. User scrolls through available Call Stations by name.

**MENU/O:**  
Allows Call Station selection through use of the Left/Right arrows.

**ALL CALL:**  
Allows outbound audio connection to all Call Stations simultaneously.

**STD BY:**  
User presses STD BY (Standby) button to cancel a Call Station or Selector connection. Terminates connection.

**TALK:**  
Controls talk/listen communications. User presses TALK button to cancel the alert tone and to transmit outbound audio.

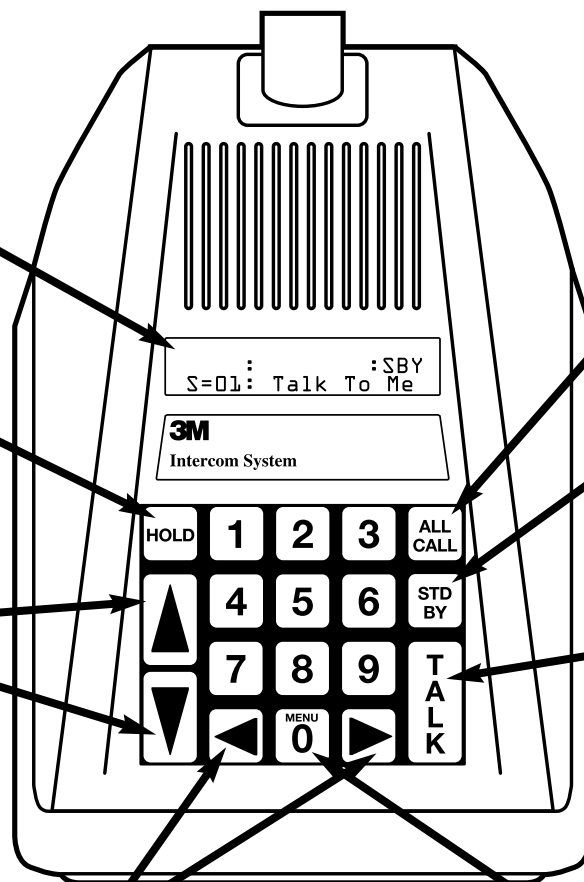

### Setting Volume

Pressing the Up/Down arrows adjusts the selector volume through 15 levels. The new level is momentarily displayed each time an Up/Down arrow key is pressed. On line default level is 8.

### One Call Station Calling Selector

(Customer at pump calling attendant)

- Customer presses Push for Service button located at pump.

Selector at counter beeps.

**Display shows:**

```
Q=01:           : SBY
S=04: PUMP # 04
```

- Q=01 indicating there is one call in the queue waiting to be answered.
- Call Station number and name (station 4 in this example).

- Attendant:

- Press and hold TALK key down.
- Speak into microphone.

Selector stops beeping.

**Display shows:**

```
           :       : TLK
S=04: PUMP # 04
```

- Clears Q=01 indicating there are no more calls in the queue.
- Replaces SBY with TLK

- Attendant and customer talk back and forth.

Attendant:

- Holds TALK key down while speaking.

**Display shows:**

```
           :       : TLK
S=04: PUMP # 04
```

- Replaces LIS with TLK.
- Releases TALK key while listening.

**Display shows:**

```
           :       : LIS
S=04: PUMP # 04
```

- Replaces TLK with LIS

- When finished, attendant presses STD BY key.

**Display shows:**

```
           :       : SBY
           :       :
```

- Replaces LIS or TLK with SBY.

### Calling From Selector to Call Station

(Attendant calling customer at pump)

There are three ways to call from the Selector to a Call Station.

- Select a specific Call Station by number.
- Use MENU/O.
- Use All Call Mode. *See All Call Mode.*

#### Select a Specific Call Station by number

System must be in Standby mode. To select a specific Call Station by number:

- Use the number keys to select the Call Station being called (Call Stations 1 through 9 are entered as one digit).

Display shows the Call Station number and name.

- Proceed as described in Steps 2 through 4 under the previous section *One Call Station Calling Selector*

#### Use MENU/O

MENU/O allows searching for a Call Station by name. The system must be in the Standby mode. To use MENU/O:

- From the Standby mode, press the MENU/O key. The display shows S = 01 and the station 1 name.
- Do one of the following:
  - Use the Left/Right Arrow keys to find the desired Call Station.
  - Select a Call Station by number as a starting point:
    - Use the number keys to select a starting point.
    - Use the Left/Right Arrow keys to find the desired Call Station.

- Proceed as described in Steps 2 through 4 under the previous section *One Call Station Calling Selector*.

### All Call Mode

The All Call mode allows the attendant to speak to all Call Stations at once. All Call mode can be entered from Standby mode or while a call is established. To use All Call mode:

- Hold the ALL CALL key down.

**Display shows:**

```
           :       : TLK
A L L C A L L
```

- ALL CALL and TLK

- Talk into the microphone.
- Release the ALL CALL key.

The system goes to the Standby mode or to the previous call connection.

### Using the Hold Feature

The Hold feature allows an attendant to disconnect from a current call and connect to a new call without losing the first call. This is useful for disconnecting from a current call, momentarily greeting a newer call, then returning to the first call. More than one call can be placed on hold.

Assume a current connection to Call Station 12, and a second attempting to call.

**Display shows:**

```
Q=01:           : LIS
S=12: PUMP # 12
```

- Q=01, LIS, and the current Call Station number and name.

To use the Hold feature:

- Press the HOLD key during the current call connection

**Display shows:**

```
Q=01: HOLD=01: SBY
           : Press 'TALK'
```

- HOLD=01 (if no other calls are on hold) and SBY

The current call is placed on hold and the Selector beeps.

- Press the TALK key to answer the second call (from Call Station 8 in this example).

**Display shows:**

```
           : HOLD=01: TLK
S=08: PUMP # 08
```

- Clears Q=01.
- Shows the new station number and name and TLK.

- Press the HOLD key to place the second call on hold.

**Display shows:**

```
           : HOLD=02: SBY
           : Press 'HOLD'
```

- HOLD=02 and SBY.
- Both calls are now on hold.
- Press the HOLD key from the Standby (SBY) mode to re-connect a call that has been placed on hold.



Food Service Business

1-800-328-0033

www.3M.com/foodservice

3M Center, Building 223-2N-20  
St. Paul, MN 55144-1000

Printed in U.S.A. Revision A  
© 3M 2002 34-7052-6883-6-A